




MONARCH INSTRUMENT

the professional's choice

DC6000 Networkable Paperless Data Acquisition System

Copy the firmware NK_1_1_0.bin file to a removable drive (Compact Flash or USB).

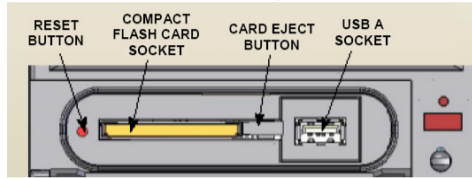


Insert the removable drive into the DC6000.


Click on the Utility Set-up button:



Click on the System Admin menu button:




Click on the Re-flash Firmware button:

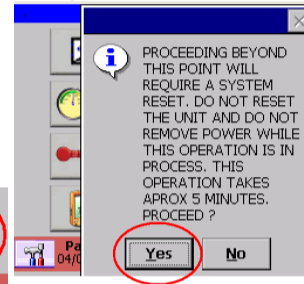

Select "Yes".

You will be asked to erase the registry:

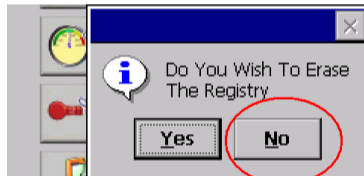


Select "No".

Select the drive you have the new firmware on:



Select the file: NK_1_1_0.bin:

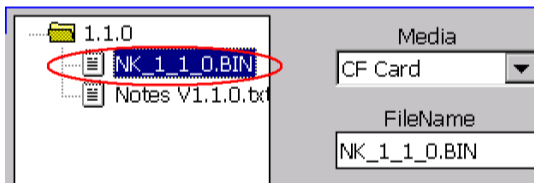

You will see the "Updating Image" screen.



WARNING: DO NOT TOUCH THE DISPLAY OR REMOVE POWER FROM THE RECORDER WHILE THE FIRMWARE IS BEING UPDATED. THIS WILL RESULT IN A FAILURE THAT REQUIRES REPAIR AT THE FACTORY!

Reset the recorder: Use the stylus and press the reset button at the front of the recorder to the left of the CF slot.

