




ROS-HT-W-25 High Temperature Remote Optical Sensor



SPECIFICATIONS:

| | |
|---------------------------|---|
| Speed Range: | 1 to > 50,000 RPM at 24" [.61 m] |
| Illumination: | Incandescent lamp |
| Operating Temp.: | -13° to 257° F [-25° to 125° C] |
| Operating Range: | up to 24" [0.76 m] and 30 degrees from target |
| Power Requirement: | 6 - 24 Vdc @ 40mA |
| Output Signal: | Positive pulse 0 to input voltage (+V) |
| Cable Length: | 25 feet [7.6 m] |
| Connection: | Tinned wires |
| Material: | 303 Stainless Steel supplied with two M16 Jam Nuts and Mounting Bracket |
| Lens: | Glass Pyrex |
| Dimensions: | Threaded Tube 2.90 in x 0.62 in diameter [M16 x 1.5 x 74 mm] long |

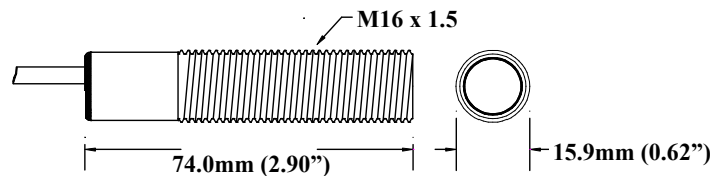

CONNECTION DETAIL:

| <u>Wire Color</u> | <u>Function</u> | |
|-------------------|---------------------------|-------|
| Red | Positive Power Supply | (+V) |
| Black | Common | (Com) |
| White | Signal (0 to + Vdc Pulse) | (Sig) |
| Shield | Housing Ground | (Com) |



OPERATING INSTRUCTIONS:

The ROS-HT-W-25 High Temperature Remote Optical Sensor is capable of detecting a reflected pulse from a target consisting of Reflective Tape at distances of up to 24 inches [.76 m] from the rotating object and angles up to 30 degrees. For most applications, a ½" [12 mm] square piece of Reflective Tape (T-5) should be applied to a clean area on the rotating object.

NOTE: The T-5 tape supplied with the ROS-HT-W-25 is rated at 175 °F [79.4 °C] for continuous exposure and 250 °F [121 °C] for intermittent exposure (30 minutes). Higher temperature rated tape available upon request.

The Sensor should be mounted and optically aligned to illuminate the target once per revolution. The user must hold "steady" or mount the ROS-HT-W-25 to obtain an accurate measurement. It is recommended that the optical Sensor be placed at a slight angle (15 degrees) from perpendicular, so that the Sensor will receive only pulses from the reflective marker. The ROS-HT-W-25 should be at least 1 inch from the reflective target to avoid false triggering.

The ROS-HT-W-25 will work with all Monarch panel instruments that accept pulse inputs (e.g. ACT Series, F2A Frequency to Analog Converter/Tachometers).

CAUTION: DO NOT HANDLE SENSOR AT ELEVATED TEMPERATURES.



In order to comply with EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE):

This product may contain material which could be hazardous to human health and the environment. DO NOT DISPOSE of this product as unsorted municipal waste. This product needs to be RECYCLED in accordance with local regulations, contact your local authorities for more information. This product may be returnable to your distributor for recycling - contact the distributor for details.

Monarch Instrument
15 Columbia Drive, Amherst, NH 03031 USA
Tel: (603) 883-3390
www.monarchinstrument.com