



## FAQ

### **Question:**


How do I program recorder to start recording when a point goes into alarm?

### **Answer:**

1. First program your required points and set the alarms for that point at the required level.
2. Under Program – Record Setup – Points (Trigger) – Specify the points numbers that you wish to be a trigger for the recorder start up. Answer Yes or No for each point.
3. Go to Function – Record On/Off – Select Trigger – Trigger On? – Yes. Exit out and the recorder will trigger (start recording) when the alarm or alarms on any point is activated.



Check 50/60 Hz Reject Selection box. (This limits sample rate to 2 per second)

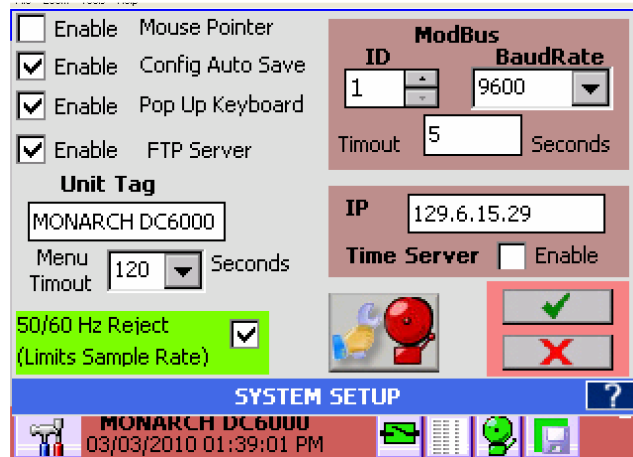

Touch the enter (green check) button.